

40  
min

192  
Samples

High-throughput, High integrated,  
User-friendly, Maximizing testing efficiency!



# MGISTP-7000

Your High-throughput Automated  
Sample Transfer Processing system

To Develop and Promote Advanced Life  
Science Tools for Future Healthcare


MGI Tech Co., Ltd.

# MGISTP-7000



MIGSTP-7000 is our newest high-throughput automated sample transfer processing system. It integrates tube decapping, tube recapping, barcode identification, automated liquid transfer and negative pressure protection. It decreases steps and delivers the quality and reliability you expect. You can transfer 192 samples from screw cap transport tubes or plain tubes to 96-Well Microplates in 40 minutes.

Two channel independent pipette heads, offer a volume range from 10uL to 1000uL. Enabling flexibility efficiency, safety and process quality. All the steps are integrated in a closed and negative pressure system. Two HEPA-filtration and one UV light ensure a safer working environment for both liquid transfer and lab technicians.

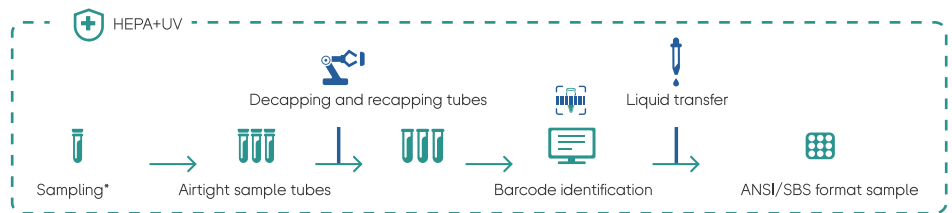

## 1 Load original sample with cap

Load Airtight sample tubes into a standard rack and reduce exposure to samples.

## 2 Automatically scan the code and open the cap

One Epson robot arm, four recap and de-cap modules, four barcode scanners and two channel independent pipette heads, can transfer 192 clinical samples from screw cap or plain transfer tubes to 96-Well Microplates in 40 minutes. Barcode information can be automatically stored and transferred to ZLIMS system, providing information traceability.

## 3 Subpack into 96-well microplate

Two pipetting channels –freely configurable for volume range and use with disposable tips. Samples can be transferred into ANSI/SBS 96-well microplates rapidly, without manual pipetting errors. ANSI/SBS format sample supports a wide variety of automation laboratory equipment.

## 4 Close caps and recycle tubes automatically

Re-cap sample tubes and put to back to original location, after liquid transferring, to minimize sample exposure and prevent cross contamination. Provide HEPA-filtration and UV light to ensure a safer operation environment.



\*Universal fit. Excellent fit on 5mL and 10mL transport tube with screw cap.

## Unmatched safety


Supply/Exhaust air filter provides ISO5, 99.995% at 0.3um, creating a particle-free environment inside of MGISTP-7000, which is ideal for most microbiological applications. There is also a filter for potentially contaminated air, exhausting to the outside of the building and providing a safe working environment for Lab.



## Powerful and User-friendly


An easy-to-use software platform, allows effortless set-up and quick operation. Just a single-click, it will finish the tedious sample pre-analytical steps for you.

Flexible automation upgrade solution - MGISTP-7000 can connect with ZLIMS system, which is a powerful laboratory management software, helping you integrate various third part instruments, such as RT-PCR system and nucleic acid extraction system.

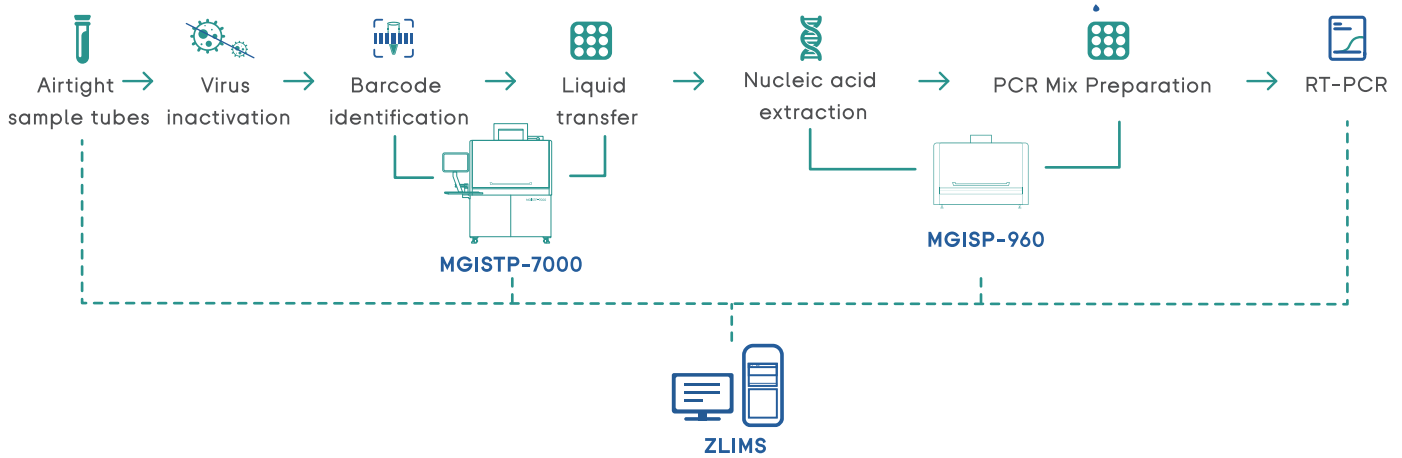

## One-Stop Sample Preparation and High Productivity

MGISTP-7000 is designed for laboratories that require high productivity. You can transfer 192 clinical samples from screw cap transport tubes to 96-Well Microplates in 40 minutes. For very high throughput testing operations, you just need to add multiple downstream nucleic acid extraction systems. If you own a standard liquid transfer instrument, high-throughput MGISTP-7000 can maximize your PCR testing efficiency.

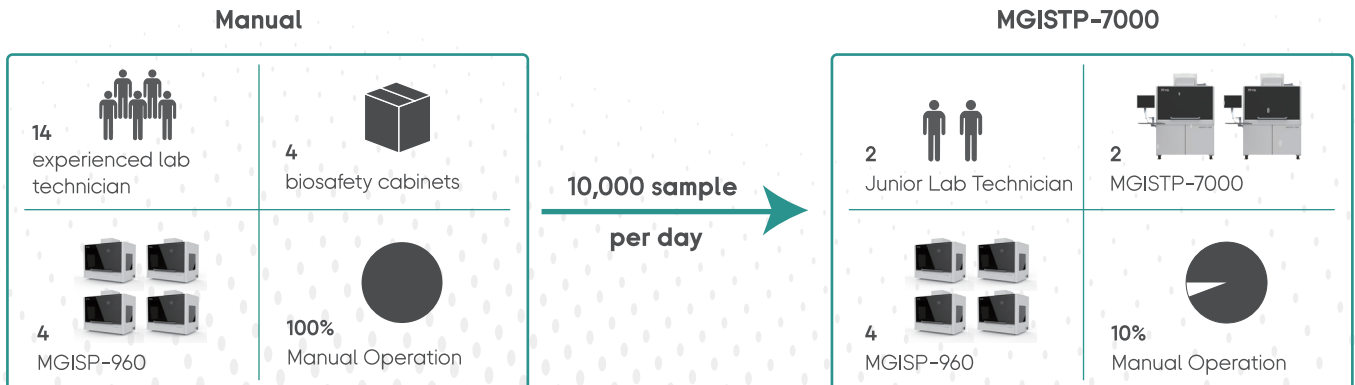



# MGISTP-7000

## Sample Transfer Processing system

Single-Click to Operate, Fast and High Accuracy

### Product specifications

Model	MGISTP-7000		Pipetting Precision	Pipetting Method	Base on the principle of air displacement, with disposable tips
Dimensions	1470mm(W)*960mm(D)*2100mm(H)			Volume Range	10 µL-1000 µL
Weight	550kg		CV		10 µL: <5% ; 100 µL: <2%
Electrical Requirements	Power	100 - 240 V			1000 µL: <1%
	Hz	50/60 Hz		Accuracy	10 µL: <±10% ; 100 µL: <±5%
	Power Consumption	1000VA		1000 µL: <±2%	
Operating Environment	Temperature	19 °C ~ 25 °C	Robot Arm Accuracy	X-Y-Z: ±0.1mm	
	Relative Humidity	20% RH ~ 80% RH, Non-condensing	Barcode Scanner	Four 1D Scanner Sensors	
	Atmospheric Pressure	80 kPa ~ 106 kPa	Protection	UV Light	36W
Functions	Integrate multiple functions, including decapping, recapping, barcode identification, automated liquid transfer, HEPA-filtration and negative pressure protection.		Tube Compatibility	Supply/Exhaust Air Filter	ISO5, HEPA 99.995% at 0.3µm, Negative Pressure System
Throughput	192 Samples/40 min				Universal fit. Excellent fit on 5mL and 10mL Ttransport tube with screw cap.

### Ordering Information

Model	Intended Market
MGISTP-7000	China & Overseas IVD
MGISTP-7000RS	China & Overseas RUO

## CONTACT US

### MGI Tech Co., Ltd.

Building 11, Beishan Industrial Zone, Yantian District, Shenzhen

✉ MGI-service@genomics.cn    🌐 www.mgitech.cn    ☎ 4000-966-988

#### Copyright Disclaimer

The copyright of this brochure is solely owned by MGI Tech Co. Ltd.. The information included in this brochure or part of, including but not limited to interior design, cover design and icons, is strictly forbidden to be reproduced or transmitted in any form, by any means (e.g. electronic, photocopying, recording, translating or otherwise) without the prior written permission by MGI Tech Co., Ltd.. All the trademarks or icons in the brochure are the intellectual property of MGI Tech Co., Ltd. and their respective producers.

